


New Products 2010

WEICON Repair Sticks

The uncomplicated solution for all repair and maintenance work. Temperature resistant from -50°C (-58°F) up to +120°C (+248°F), briefly up to +150°C (+302°F). Easy to use:

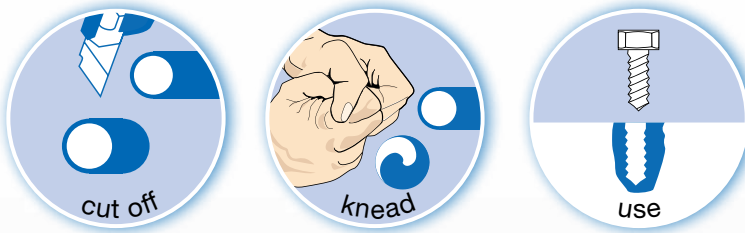

Type Concrete – For quick repairs and reconditioning of all concrete, stone and ceramic surfaces. Fills and closes cracks and defect parts on masonry, stone slabs, concrete slabs and tiles, bricks, borders and kerbstones, statues, gravestones and ornaments.

Content: 57 g Art.-No.: 10537057
115 g Art.-No.: 10537115

Type Stainless Steel – For non-corroding repairs and reconditioning of stainless steel and other rust-proof metals. Due to the quick mechanical loading capacity of the mended parts (approx. 60 min.), expensive and longer downtimes are avoided.

Content: 57 g Art.-No.: 10538057
115 g Art.-No.: 10538115



WEICON Flex M® Stainless Steel

Elastic one-component adhesive/sealant on the basis of a POP hybrid polymer. Flex 310 M Stainless Steel contains neither substances that disturb lacquer wettings (e. g. silicone) nor solvents or isocyanates. Flex 310 M Stainless Steel has a high adhesion power and does not cause corrosion on sensitive surfaces. Therefore, it is particularly suitable as bonding agent or joint and seam sealant on stainless steel, aluminium and non-ferrous metals.

Content: 290 ml Art.-No.: 13656290

WEICON Contact VA 30 Black

One-component cyanoacrylate adhesive. Special rubber-filled type with black colour. Ideal for bonding rubber materials (e. g. solid rubber, cellular rubber, etc.), plastics as well as metal to plastic. Medium viscosity (200-300 mPa·s), residual elasticity after curing.

Content: 12 g Art.-No.: 12603012
30 g Art.-No.: 12603030
60 g Art.-No.: 12603060



ISEGA

Testing institute for chemical, physical and micro-biological analytics



WEICON Copper Paste

Copper Paste is a protecting, separating and lubricating agent for highly stressed parts, used as assembly lubricant for threaded joints and sliding surfaces of all kinds. Even with temperatures of -20°C (-4°F) to 1,100°C (+2,012°F) and corrosive atmospheres, fretting corrosion and seizing is prevented efficiently.

<i>Content: 30 g Pen</i>	<i>Art.-No.: 26200003</i>
<i>450 g Can</i>	<i>Art.-No.: 26200045</i>
<i>1,0 kg Can</i>	<i>Art.-No.: 26200100</i>
<i>10,0 kg Bucket</i>	<i>Art.-No.: 26200910</i>
<i>400 ml Spray Can</i>	<i>Art.-No.: 27200400</i>

WEICON Surface Cleaner

For cleaning and degreasing surfaces to be joined or sealed with WEICON adhesives and sealants. This cleaner can be applied on materials like metal, glass, ceramic and most plastics*. Only grease-free and clean surfaces guarantee both good adhesion and reliable curing of the adhesive. Evaporates without leaving residues.

* Check surface compatibility prior to use.

Content: 400 ml Art.-No.: 11207400

WEICON Mould Cleaner

Highly active organic solvents remove wax, silicones, oils, non-cured PUR-residues and other impurities from plastic, steel and aluminium moulds. Evaporates without leaving residues.

Content: 500 ml Art.-No.: 11203550

WEICON GmbH & Co. KG

Königsberger Str. 255 · DE-48157 Münster
P.O. Box 84 60 · DE-48045 Münster

Tel. +49 (0) 251 / 93 22-0
Fax +49 (0) 251 / 93 22-244
Fax +49 (0) 251 / 93 22-233 Export
www.weicon.de · info@weicon.de

WEICON

Middle East L.L.C.

Jebel Ali Ind Area 3
P.O. Box 118 216
Dubai · U.A.E
Phone +971 4 880 25 05
Fax +971 4 880 25 09
Mobile +971 50 545 99 83
www.weicon.ae
info@weicon.ae

WEICON Inc.

20 Steckle Place · Unit 20
Kitchener · Ontario N2E 2C3
Canada
Phone +1 519 896 5252
Fax +1 519 896 5254
Cell +1 519 590 5168
www.weicon.ca
info@weicon.ca

Distributed by:

A&G GEARBYTE TECHNOLOGIES LTD

Tel.: +357 25 71 44 19
Fax.: +357 25 56 59 41
E-mail: info@gearbyte.com
http://www.gearbyte.com

7A Achilles str., Ayios Ioannis, 3016 Limassol, Cyprus

Detailed information on these products is available from our single brochures and at www.weicon.de

The specifications and recommendations given in this brochure must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.